

Model		DPX-19839
	kva	180
Prime power	kw	144
Ctara dlave ra accesa	kva	200
Standby power	kw	160
Rated voltage line to line	V	400
Rated current	Α	259,2
Maximun sound level	dB@7m	75
Engine-FPT		
Model		6CTA8.3-G1
Aspiration		Four-stroke, water-cooled, in-line, direct injection, turbocharged,
No. cylinders		after cooled BYC PB/RSV Mechanical
Displacement	L	6
Bore*Stroke	mm	8,3
Compression ratio		114x135
Rated speed	r/min	17.3:1
Governor		1500
Dry weight	kgs	Electric system
Size	mm	637
Fire order		750-850
Start Motor	V	1-5-3-6-2-4
		24
Exhause System		
Max exhaust back pressure	kPa	13
Exhuast pipe size	mm	75
Air intake System		
Max inlet pressure (Dirty air)	kPa	6
Max inlet pressure (Clean air)	kPa	4
Fuel Cystom		
Fuel System 110% load(Standby power)	L/h	48
100% load(Prime power)	L/h	40
75% load(Prime power)	L/h	31
50% load(Prime power)	L/h	21
25% load(Prime power)	L/h	13
Fuel capacity for silent genset	L	285
Lubrication System	. 5	100
Idle speed oil pressure	kPa	103
Governed speed oil pressure	kPa °⊂	276-414
Max Oil temp	$^{\mathbb{C}}$	121 27.6
Oil capacity	L	27,6

lina	Syste	
,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	3V STE	488

Coolant capacityEngine only	L	12,3
Max coolant friction head to engir	Кра	35
Max water temp standby/prime po	${\mathbb C}$	104/100

Standard Features

Engine(Cummins ENGINE)
Radiator 50°C max,fans are driven by belt
24V charge alternator
Alternator: single bearing alternator IP23
insulation class H/H
Standard auto control system
One set of air filter, fuel filter, oil filter
Main line circuit breaker / ACB
Base fuel tank
Two 24V batteries, rac and cable
Exhaust system(Ripple flex exhaust pipe)
Exhaust siphon, flange, muffler
User manual •
Battery charge •
Water heater •

Options

Alternator heater		0
PMG		0
Water oil separator		0
Daily fuel tank		0
Remote control panel		0
Automatic transfer switch/ATS		0
Switch box		0
Standard: ●	Options:	

Alternator

	TAL-A44-L
	Leroy Somer
	3
V	230/400
	12 wires
	1
	0,8
Hz	50
KVA	180
	Brushless, self-excitation
%	±0.5
	IP 23
	Н
	Hz KVA


Controller-Deepsea

Model	DSE 6120
7 digital diamia.	

7 digital display

Built-in governor and AVR control
Base load (kW export) functionality
Mains (utility) de-coupling protection
Generator power (kW, kVA) monitoring
Overload (kW & kV Ar) protection
Emergency stop
Start failure



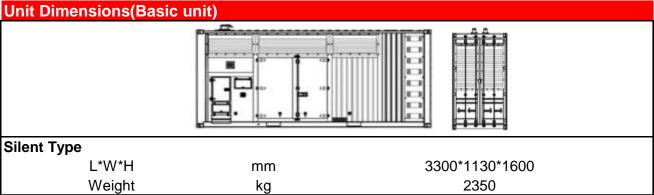

Warranty

Cummins Engine

12 months from date of purchase or 1000 hours.

Generator

12 months from date of purchase or 1000 hours (whichever comes first).