

# Cat® XQP115 Rental Generator Set



**Prime 115 kVA (92 kW)  
50/60 Hz Switchable  
EU Stage V**

Image shown may not reflect actual configuration.

## Specifications

Frequency (Hz)	Speed (rpm)	Voltage	Prime		Output Amps (A)	Breaker Rating (A)
			kVA	kW		
50	1500	415 / 240 V	115	92	160	200
		400 / 230 V	115	92	166	
		380 / 220 V	115	92	175	
60	1800	480 / 277 V	125	100	150	200
		440 / 254 V	125	100	164	
		380 / 220 V	120	96	182	

Cat® C4.4 Diesel Engine	Metric	Imperial (English)
Configuration	Inline 4-cylinder, 4-Stroke-Cycle, Water Cooled, Diesel	
Bore	105 mm	4.13 in
Stroke	127 mm	5 in
Displacement	4.4 L	268 in <sup>3</sup>
Aspiration	Turbocharged-Aftercooled (TA)	
Compression Ratio	18.23:1	
Engine rpm	1500–1800	
Aftercooler Type	ATAAC	
Turbocharger	Single	
Fuel System	Direct Injection, Rotary Pump	
Governor Type	Electronic Governor, Mechanical Actuator	
Fuel	See Fuel Specification Table	

## Benefits & Features

### Rental-ready Features

- Dual wall tank base with drag / tie down points and robust skid plate
- Forklift pockets
- Externally certified dual point lift
- Certified spark arrest system
- 50/60 Hz frequency switch via terminal link
- EMC certified
- Robust busbar connection for lugged cable connection
- AC protected by limit switch on distribution door

### Fuel/Emissions Strategy

- EU Stage V

### Single-source Supplier

- Factory designed and fully prototype tested with torsional vibration analysis available
- ISO 9001:2000 compliant facility

### Cat® C4.4 Diesel Engine

- Four-stroke diesel engine combines consistent performance and excellent fuel economy with minimum weight
- Electronic ECM control

### After Treatment

- Diesel Emissions Fluid (DEF) Tank located in discharge box, accessible through lockable access door
- DEF tank capacity is sufficient to last more than 34 hrs when fully filled (based on 75% Prime load)

### XQCP Control Panel

- Fully featured power metering, protective relaying, engine/generator control and monitoring
- Simple user-friendly interface and navigation

### Available Options

- CE socket box with integrated MCB & RCBO protection
- Synchronising control panel and motorised breaker
- Anti condensation heater 230V AC
- Coolant heater 230V AC
- Permanent Magnet Generator (PMG)
- Earth leakage detection
- Lube oil sump pump
- Fuel Option Pack – Inboard mounted 3-way valve for external fuel connection, electronic fuel gauge and Bund Level Sender
- Battery option – 12V 950CCA maintenance-free CAT Batteries
- Battery Isolator – Single pole (padlockable)
- 12V battery charger
- Control Panel noise breakout option
- Drains option Pack – Oil and coolant drains piped to baseframe

### Cat LC3100 Generator

- Designed to match performance and output of Cat diesel engines
- Coastal insulation protection
- Self (shunt) excitation

### Automatic Voltage Regulator (AVR)

- Three-phase sensing
- Adjustable Volts-per-Hertz regulation
- Provides precise control, excellent block loading, and constant voltage in the normal operating range

### Enclosure

- Galvanized sheet steel construction
- Two coat polyester powder-coated finish
- 6 access doors for improved service access
- Secure design with safety glass control panel viewing window and padlockable or keylock access doors
- Fuel fill, battery and controls accessible only through lockable access doors

### Environmental Considerations

- 110% spill containment of all on-board engine fluids and bund level alarm
- Low noise enclosure

### Cat Connect

- Fleet management and asset tracking\*

\*Subject to local certifications

## Standard Equipment

### Generator

- LC3114F frame; 3-phase random wound, 12 lead, self-excited, 2/3 pitch
- Coastal insulation protection (CIP)

### Cat® C4.4 Diesel Engine

- Turbocharged, air-to-air aftercooler
- Electronic ECM control

### After Treatment

- Remote mounted Clean Emissions Module (CEM)
- Diesel Emissions Fluid (DEF) Tank located in discharge box, accessible through lockable access door

### Air Filter

- Air cleaner, cyclonic/paper with dust cup and service indicator

### Cooling System

- Package mounted radiator with vertical air discharge
- High ambient performance
- Fully guarded pusher fan
- Low coolant level shutdown
- 50% glycol mix with corrosion inhibitor

### Charging System

- Charging alternator; 12V, heavy duty with integral regulator and belt guards

### Starting System

- Single 12V electric starting motor
- Single 12V 950CCA maintenance-free battery with padlockable single-pole isolator switch

### Fuel System

- 24 hr dual wall fuel tank (based on 75% Prime load)
- Internal fuel fill
- Engine mounted primary and secondary fuel filter
  - o Primary filter (10 micron) with integral water separator (330 ml capacity)
  - o Secondary filter (4 micron)
- Automatic onboard priming pump
- Mechanical fuel gauge

### Control Panel

- XQCP set mounted digital controller
- 50/60Hz frequency switch (via terminal link)
- Automatic Voltage Regulator (AVR) with D350 excitation module
- Panel & enclosure mounted emergency stop

### Distribution System

- Separate robust steel enclosures for control & distribution sections
- Distribution door protected with 12V DC shunt trip safety switch
- 4 pole, 200A main circuit breaker
- Two-wire remote start/stop terminals and AC aux power connection for rapid starting

### Mounting System

- Heavy duty steel baseframe with integral fuel tank (dual wall)
- Provides 110% spill containment including all on-board fluids
- Forklift pockets
- Skid plates with drag points
- Generator set soft mounted using captive vibration mounts

### Enclosure

- Sound attenuating, galvanised sheet steel enclosure with exceptional noise reduction performance
- Interior walls, ceilings and ducts insulated with precision cut noise insulating materials
- Sealed quarter-turn compression latches with key or padlock capabilities
- External side-mounted dual point lifting frame for improved hook access
- Powder coated with Cat Rental Power decals

### Exhaust System

- Certified spark arresting system
- Outlet box mounted with vertical discharge

### Lube Oil System

- On-engine primary and secondary oil filters, dipstick and oil filler
- Closed crankcase breather
- 500-hour oil change requirement

### General

- Factory Tested
- Full manufacturer's warranty, O&M manuals



**Fuel Specifications**

Specification Standard	Grade Class	Fuel Description
EU Stage V specifies Ultra Low Sulphur Diesel		Ultra-Low Sulphur Diesel Only (ULSD) ULSD with a maximum fuel sulphur level of either 15 or 20 ppm1 is required in all diesel applications using a diesel particulate filter (DPF and DOC).  Bio-diesel fuel may be used up to B20 (80% standard ULSD with 20% bio-fuel dilution by volume), provided an appropriate approved additive is used.

**Oil Specifications**

Specification Standard	Oil Description
EU Stage V Recommended oil 15W-40 CK-4 1E1867F	CAT DEO-ULS (Preferred)

**DEF Specifications**

Specification Standard	DEF Description
EU Stage V DEF Requirements ISO22241-1	European automotive fuel (DERV)

**Technical Data**

Cat® Generator	
Frame size	LC3114F
Pitch	2/3
No. of poles	4
Excitation	Static regulated, brushless, self excited
Number of bearings	Single bearing, close coupled
Insulation	Class H
Temperature rise	125/40°C
Enclosure	Drip proof IP23
Overspeed capability — % of rated	25%
Voltage regulator	3-phase sensing with adjustable volts per hertz
Voltage regulation	Less than ± 0.5%
Wave form deviation Telephone Influence Factor (TIF) Harmonic Distortion (THD)	Less than 2% Less than 2%

Cat Generator Set			
	TMI Performance No. Units	Prime — 50 Hz P6324B	Prime — 60 Hz P6320A
<b>Power Rating</b>	kVA (kW)	115 (92)	120 (96)
<b>Performance Specification</b>			
<b>Lubricating System</b> Oil pan capacity	L (gal)	7 (1.85)	
<b>Fuel System</b> Fuel consumption — 100% Load 75% Load 50% Load Fuel tank capacity Running time @ 75% rating	L/hr (gal/hr) L/hr (gal/hr) L/hr (gal/hr) L (gal) Hr	27.3 (7.2) 20.4 (5.3) 13.9 (3.7) 518 (136.8) 25.4	28 (7.4) 21 (5.5) 27.3 (7.2) 518 (136.8) 24.7
<b>After Treatment*</b> DEF Tank Capacity	L (gal)	28 (7.4)	
<b>Cooling System</b> Ambient capability Engine & radiator coolant capacity Engine coolant capacity	°C (°F) L (gal) L (gal)	36(96.8) 19.5 (5.1) 9.1 (2.4)	43(109.4) 19.5 (5.1) 9.1 (2.4)
<b>Air Requirements</b> Combustion air flow	m³/min (cfm)	6.7 (236.6)	7.3(257.7)
<b>Exhaust System</b> Exhaust flow at rated — dry exhaust Exhaust temperature at rated kW	m³/min (cfm) °C (°F)	14.1 (498) 530 (986)	15.6 (551) 530 (986)

\*DEF consumption is on average approximately 4% of the fuel consumption.

**Technical Data (continued)**

Cat Generator Set			
	TMI Performance No. Units	Prime — 50 Hz P6324B	Prime — 60 Hz P6320A
<b>Noise Rating (with enclosure) **</b>			
<b>Sound Power*</b>	dB(A)	92	96
@ 7 meters @ 75% load	dB(A)	64.9	68.9
@ 7 meters @ 100% load	dB(A)	65.9	69.6
@ 1 meters @ 75% load	dB(A)	75.3	78.9
@ 1 meter @ 100% load	dB(A)	75.8	80
<b>Emissions data at 100% Load</b>			
Nox	g/hp-hr	TBC	TBC
CO	g/hp-hr	TBC	TBC
HC	g/hp-hr	TBC	TBC
PM	g/hp-hr	TBC	TBC

\*\*Guaranteed sound power as per 2000/14/EC.  
For full Engine & Emissions data please refer to TMI using the engine performance no.


Dimensions			
	Length — mm (in)	Width — mm (in)	Height — mm (in)
Generator Set	2 970 (116.9)	1 150 (45.3)	2 076 (81.7)

Weight	
	Weight — kg (lb)
Lube Oil & Coolant — Empty Fuel Tank	2 077 (4 579)
Full Fuel Tank	2 527 (5 571)

Sockets	15A	16A	32A	50A	63A	125A
CEE Form*	–	2x1ph+N+E	2x3ph+N+E	–	1x3ph+N+E	–


\*Busbar connection is standard. Distribution sockets are optional.

**Layout for General Dimensions**  
Dimensions in millimeters (inches)

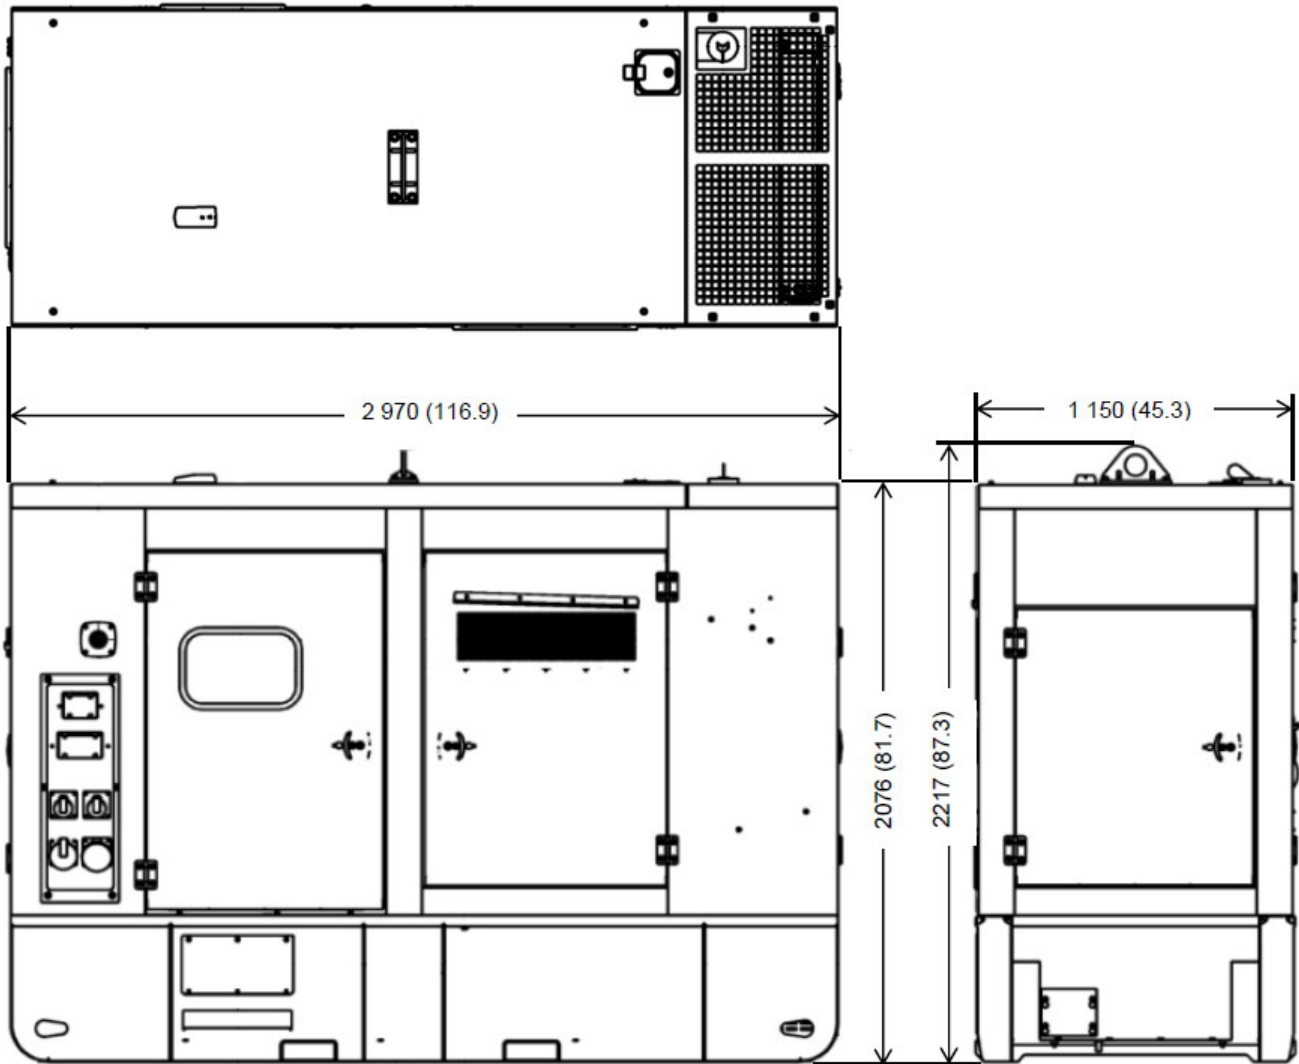

## Control Panel and Power Distribution Layout

Item	Description
1	Steel enclosure with hinged, lockable door (not shown)
2	XQCP digital generator set controller
3	Emergency Stop button
4	Alarm
5	Service tool connector
6	Circuit breaker. 4-pole molded case, 630A
7	Main bus connection (bus bars with 14 mm holes)
8	Micro safety switch for bus bar door
9	Manual holder
10	Emission system failure lamp
11	Low DEF level lamp

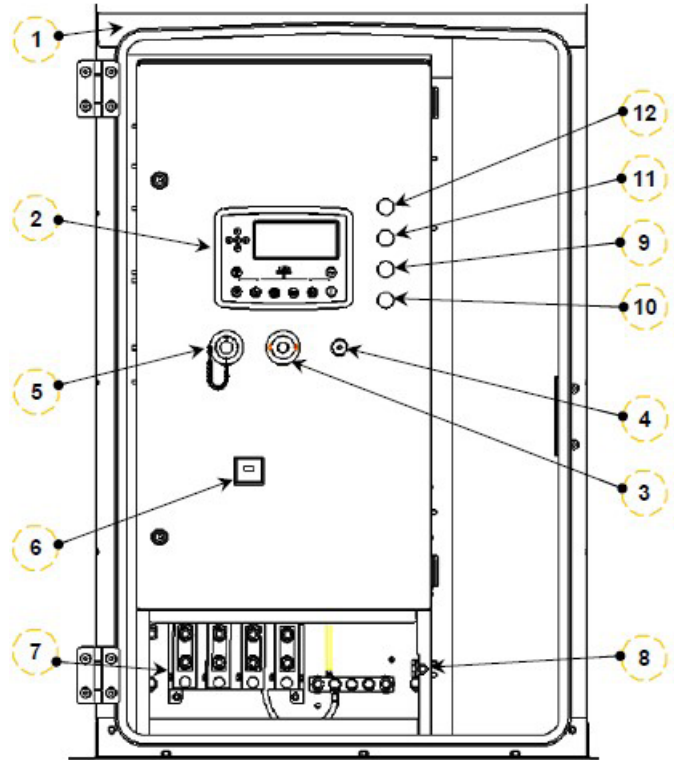

### Rating Definitions and Conditions

**Designed to Meet Specifications:** ISO 8528, EN 12601, EN 60204-1, ISO 3046, IEC 60034.

**Ratings** are based on SAE J1349 standard conditions. These ratings also apply at ISO3046 standard conditions.

**Prime** — Output available with varying load for an unlimited time. Average power output is 70% of the prime power rating. Typical peak demand is 100% of prime rated kW with 10% overload capability for emergency use for a maximum of 1 hour in 12. Overload operation cannot exceed 25 hours per year.

**Fuel rates** are based on fuel oil of 35° API [16°C (60°F)] gravity having an LHV of 42 780 kJ/kg (18,390 Btu/lb) when used at 29°C (85°F) and weighing 838.9 g/liter (7.001 lbs/U.S. gal).

Additional ratings may be available for specific customer requirements, contact your Cat representative for details. For information regarding low sulfur fuel and biodiesel capability, please consult your Cat dealer.

[www.cat.com/electricpower](http://www.cat.com/electricpower)

©2024 Caterpillar  
All rights reserved.

Materials and specifications are subject to change without notice.

The International System of Units (SI) is used in this publication. CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow" the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.