

DIESEL GENERATOR SET



DE22E3

EU stage IIIA emissions compliant.
Suitable for Mobile Applications in the European Community.

Output Ratings		
Generator Set Model - 3 Phase	Prime*	Standby*
400/230 V, 50 Hz	20.0 kVA 16.0 kW	22.0 kVA 17.6 kW
220/127V, 60 Hz	22.5 kVA 18.0 kW	25.0 kVA 20.0 kW

* Refer to ratings definitions on page 4.
Ratings at 0.8 power factor.

Technical Data		
Engine Make & Model:	Cat® C2.2	
Generator Model:	LC1114M	
Control Panel:	EMCP 4.1	
Base Frame Type:	Heavy Duty Fabricated Steel	
Circuit Breaker Type:	3 Pole MCB	
Frequency:	50 Hz	60 Hz
Engine Speed: RPM	1500	1800
Fuel Tank Capacity: litres (US gal)	66 (17.4)	
Fuel Consumption, Prime: l/hr (US gal/hr)	5.3 (1.4)	5.8 (1.5)
Fuel Consumption, Standby : l/hr (US gal/hr)	5.9 (1.6)	6.5 (1.7)

DIESEL GENERATOR SET



Engine Technical Data

Physical Data	
Manufacturer:	Caterpillar
Model:	C2.2
No. of Cylinders/Alignment:	4 / In Line
Cycle:	4 Stroke
Induction:	Naturally Aspirated
Cooling Method:	Water
Governing Type:	Mechanical
Governing Class:	ISO 8528
Compression Ratio:	23.3:1
Displacement: l (cu.in)	2.2 (135.2)
Bore/Stroke: mm (in)	84.0 (3.3)/100.0 (3.9)
Moment of Inertia: kg m ² (lb. in ²)	2.72 (9308)
Engine Electrical System:	
-Voltage/Ground:	12/Negative
-Battery Charger Amps:	65
Weight: kg (lb) - Dry:	242 (534)
- Wet:	251 (554)

Air System	50 Hz	60 Hz
Air Filter Type:	Replaceable Element	
Combustion Air Flow:		
m ³ /min (cfm)	-Standby: 1.5 (51)	1.7 (61)
	-Prime: 1.5 (51)	1.7 (61)
Max. Combustion Air Intake		
Restriction: kPa (in H ₂ O)	3.0 (12.0)	3.0 (12.0)
Radiator Cooling Air Flow:		
m ³ /min (cfm)	33.0 (1165)	41.4 (1462)
External Restriction to		
Cooling Air Flow: Pa (in H ₂ O)	125 (0.5)	125 (0.5)

Cooling System	50 Hz	60 Hz
Cooling System Capacity:		
l (US gal)	6.5 (1.7)	6.5 (1.7)
Water Pump Type:	Centrifugal	
Heat Rejected to Water & Lube Oil: kW (Btu/min)		
	-Standby: 19.6 (1115)	22.2 (1262)
	-Prime: 17.0 (967)	19.9 (1132)
Heat Radiation to Room: Heat radiated from engine and alternator		
kW (Btu/min)	-Standby: 7.1 (404)	7.4 (421)
	-Prime: 5.7 (324)	6.3 (358)
Radiator Fan Load: kW (hp)	0.2 (0.3)	0.4 (0.5)
Cooling system designed to operate in ambient conditions up to 50°C (122°F). Contact your local Cat dealer for power ratings at specific site conditions.		

Lubrication System	
Oil Filter Type:	Spin-On, Full Flow
Total Oil Capacity l (US gal):	10.6 (2.8)
Oil Pan l (US gal):	8.9 (2.4)
Oil Type:	API CH4 15W-40
Cooling Method:	N/A

Performance	50 Hz	60 Hz
Engine Speed: RPM	1500	1800
Gross Engine Power: kW (hp)		
-Standby:	20.6 (28.0)	24.3 (33.0)
-Prime:	18.7 (25.0)	22.0 (30.0)
BMEP: kPa (psi)		
-Standby:	743.0 (107.8)	731.0 (106.0)
-Prime:	675.0 (97.9)	662.0 (96.0)
Regenerative Power: kW	5.6	7.2

Fuel System				
Fuel Filter Type:	Replaceable Element			
Recommended Fuel:	Class A2 Diesel or BSEN590			
Fuel Consumption: l/hr (US gal/hr)				
	110% Load	100% Load	75% Load	50% Load
Prime				
50 Hz	5.9 (1.6)	5.3 (1.4)	3.9 (1.0)	2.9 (0.8)
60 Hz	6.5 (1.7)	5.8 (1.5)	4.5 (1.2)	3.3 (0.9)
Standby				
50 Hz		5.9 (1.6)	4.3 (1.1)	3.1 (0.8)
60 Hz		6.5 (1.7)	4.9 (1.3)	3.6 (1.0)
(based on diesel fuel with a specific gravity of 0.85 and conforming to BS2869, Class A2)				

Exhaust System	50 Hz	60 Hz
Silencer Type:	Industrial	
Silencer Model & Quantity:	EXSY1 (1)	
Pressure Drop Across		
Silencer System: kPa (in Hg)	0.57 (0.168)	1.58 (0.467)
Silencer Noise Reduction		
Level: dB	20	11.2
Max. Allowable Back		
Pressure: kPa (in. Hg)	10.2 (3.0)	10.2 (3.0)
Exhaust Gas Flow:		
m ³ /min (cfm)	-Standby: 3.9 (139)	4.8 (168)
	-Prime: 3.6 (129)	4.3 (153)
Exhaust Gas Temperature: °C (°F)		
-Standby:	505 (941)	510 (950)
-Prime:	445 (833)	440 (824)

DIESEL GENERATOR SET



Generator Performance Data

Data Item	50 Hz				60 Hz				
	415/240V	400/230V	380/220V						220/127V
Motor Starting Capability* kVA	55	52	48	-	-	-	-	-	52
Short Circuit Capacity %	-	-	-	-	-	-	-	-	-
Reactances: Per Unit									
Xd	2.870	3.090	3.420	-	-	-	-	-	3.440
X'd	0.230	0.250	0.270	-	-	-	-	-	0.270
X''d	0.114	0.123	0.136	-	-	-	-	-	0.137

Reactances shown are applicable to prime ratings.
*Based on 30% voltage dip at 0.6 power factor.

Generator Technical Data

Physical Data	
LC SERIES	
Model:	LC1114M
No. of Bearings:	1
Insulation Class:	H
Winding Pitch - Code:	2/3 - 6
Wires:	12
Ingress Protection Rating:	IP23
Excitation System:	SHUNT
AVR Model:	R220

Operating Data	
Overspeed: RPM	2250
Voltage Regulation: (steady state)	+/- 1.0%
Wave Form NEMA = TIF:	50
Wave Form IEC = THF:	2.0%
Total Harmonic Content LL/LN:	4.0%
Radio Interference:	Suppression is in line with European Standard EN61000-6
Radiant Heat: kW (Btu/min)	
-50 Hz:	2.7 (154)
-60 Hz:	2.8 (159)

DIESEL GENERATOR SET



Technical Data



Voltage 50 Hz	Prime		Standby	
	kVA	kW	kVA	kW
415/240V	20.0	16.0	22.0	17.6
400/230V	20.0	16.0	22.0	17.6
380/220V	20.0	16.0	22.0	17.6

Voltage 60 Hz	Prime		Standby	
	kVA	kW	kVA	kW
220/127V	22.5	18.0	25.0	20.0

Weights & Dimensions

Weights: kg (lb)	
Net (+ lube oil)	447 (985)
Wet (+ lube oil & coolant)	454 (1001)
Fuel, lube oil & coolant	510 (1124)

Dimensions: mm (in)	
Length	1500 (59.1)
Width	620 (24.4)
Height	1115 (43.9)

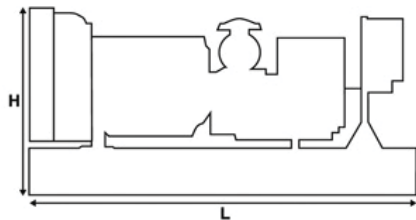

Note: General configuration not to be used for installation. See general dimension drawings for detail.

Definitions

Standby Rating

Output available with varying load for the duration of the interruption of the normal source power. Average power output is 70% of the standby power rating. Typical operation is 200 hours per year, with maximum expected usage of 500 hours per year.

Prime Rating

Output available with varying load for an unlimited time. Average power output is 70% of the prime power rating. Typical peak demand is 100% of prime rated kW with 10% overload capability for emergency use for a maximum of 1 hour in 12. Overload operation cannot exceed 25 hours per year.

Standard Reference Conditions

Note: Standard reference conditions 25°C (77°F) air inlet temp, 100m (328ft) A.S.L. 30% relative humidity. Fuel consumption data at full load with diesel fuel with specific gravity of 0.85 and conforming to BS2869: 1998, Class A2.

General Data

Documents

A full set of operation and maintenance manuals and circuit wiring diagrams.

Quality Standards

The equipment meets the following standards: **IEC60034-1, IEC60034-22, ISO3046, ISO8528, NEMA MG 1-32, NEMA MG 1-33, 2004/108/EC, 2006/42/EC, 2006/95/EC.**

Performance No.: P35228, P3518A

Feature Code: C02DE04, C02DE08, C02DE14

Gen. Arr. Number: 457-1399

LEHE0687-00 (08/14)

www.Cat-ElectricPower.com

© 2014 Caterpillar
All rights reserved.

Materials and specifications are subject to change without notice. The International System of Units (SI) is used in this publication.

CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow," the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be



Enclosure pictured may include optional accessories

Sound Attenuated Level 2 Enclosure

6.8 - 22 kVA Range

The compact modular design of the 6.8 – 22 kVA SA Level 2 enclosure range ensures optimum performance in the harshest of environments. Designed on modular principles, they have interchangeable components permitting on-site repair. Lift off doors and access panels provide optimal service and maintenance access.

Extremely durable and robust, the enclosures are designed to resist corrosion and handling damage with the ability to withstand rough handling common on many construction sites.

Developed through continuing research and development by our specialist engineers, the enclosures are fully weatherproof and incorporate internally mounted exhaust silencers.

The sound attenuated level 2 enclosures reduce sound levels to comply with the stage II levels of the European Community Directive 2000/14/EC, effective from 3 January 2006.

FEATURES

DURABLE AND ROBUST CONSTRUCTION

- Galvanised steel protected by powder coat paint
- Single piece roof structure
- Baseframe extends beyond enclosure protecting against handling damage
- Black finish stainless steel locks and hinges
- Zinc plated / stainless steel fasteners

EXCELLENT SERVICE AND MAINTENANCE ACCESS

- Side hinged doors on both sides of the enclosure opening to 180°
- Side hinged doors lift off at 90°
- Removable front and rear access panels
- Coolant drain piped to baseframe, exterior to the enclosure

SECURITY AND SAFETY

- Control panel viewing via large viewing window in lockable enclosure door
- Emergency stop push button mounted on enclosure exterior below control panel
- Cooling fan and battery charging alternator fully guarded
- Fuel fill and battery can only be reached via lockable access doors
- Exhaust silencing system totally enclosed for operator safety


TRANSPORTABILITY

- Tested and certified single point lifting facility – Optional
- Drag points on baseframe facilitating handling from both sides
- Optional base feet to aid forklift handling

SOUND PRESSURE LEVELS (dBA)

Generating Set Model	Duty	LWA	50 Hz						60 Hz					
			15 m		7 m		1 m		15 m		7 m		1 m	
			75% Load	100% Load	75% Load	100% Load	75% Load	100% Load	75% Load	100% Load	75% Load	100% Load	75% Load	100% Load
DE9.5E3	Prime	90	55.5	56.5	61.5	62.5	73.1	74.5	56.9	56.7	62.9	62.7	74.4	74.3
	Standby	90	55.7	56.8	61.7	62.8	73.5	75.0	56.8	56.6	62.8	62.6	74.3	74.3
DE13.5E3	Prime	88	52.7	53.9	58.7	59.9	70.8	71.9	55.0	56.0	61.0	62.0	72.3	74.0
	Standby	88	53.1	54.5	59.1	60.5	71.1	72.4	55.3	56.4	61.3	62.4	72.7	74.6
DE18E3	Prime	91	58.9	59.4	64.9	65.4	75.3	75.9	60.6	61.3	66.6	67.3	77.9	78.7
	Standby	91	59.0	59.6	65.0	65.6	75.5	76.2	60.8	61.6	66.8	67.6	78.1	79.1
DE22E3	Prime	91	59.2	59.9	65.2	65.9	75.7	76.6	61.3	62.7	67.3	68.7	78.7	80.2
	Standby	91	59.4	60.2	65.4	66.2	76.0	77.0	61.7	63.3	67.7	69.3	79.1	81.0
DE7.5E3S	Prime	90	55.5	56.5	61.5	62.5	73.1	74.5	56.9	56.7	62.9	62.7	74.4	74.3
	Standby	90	55.7	56.8	61.7	62.8	73.5	75.0	56.8	56.6	62.8	62.6	74.3	74.3
DE11E3S	Prime	88	52.7	53.9	58.7	59.9	70.8	71.9	55.0	56.0	61.0	62.0	72.3	74.0
	Standby	88	53.1	54.5	59.1	60.5	71.1	72.4	55.3	56.4	61.3	62.4	72.7	74.6
DE14E3S	Prime	91	58.9	59.4	64.9	65.4	75.3	75.9	60.6	61.3	66.6	67.3	77.9	78.7
	Standby	91	59.0	59.6	65.0	65.6	75.5	76.2	60.8	61.6	66.8	67.6	78.1	79.1
DE16E3S	Prime	91	59.2	59.9	65.2	65.9	75.7	76.6	61.3	62.7	67.3	68.7	78.7	80.2
	Standby	91	59.4	60.2	65.4	66.2	76.0	77.0	61.7	63.3	67.7	69.3	79.1	81.0

DIMENSIONS AND WEIGHTS

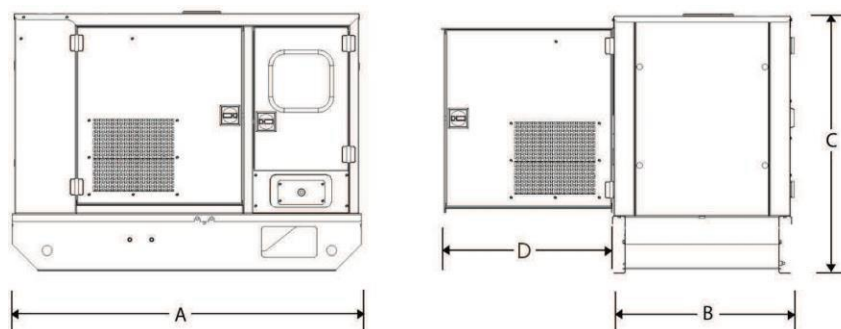

Generating Set Model	A: mm (in)	B: mm (in)	C: mm (in)	D*: mm (in)	Weight: kg (lb)	Fuel Tank Fillable Capacity: l (US gal)
DE9.5E3	1704 (67.1)	876 (34.5)	1268 (49.9)	884 (34.8)	575 (1267.7)	55.0 (14.5)
DE13.5E3	1704 (67.1)	876 (34.5)	1268 (49.9)	884 (34.8)	650 (1433.0)	55.0 (14.5)
DE18E3	1704 (67.1)	876 (34.5)	1268 (49.9)	884 (34.8)	706 (1556.5)	55.0 (14.5)
DE22E3	1704 (67.1)	876 (34.5)	1268 (49.9)	884 (34.8)	719 (1585.1)	55.0 (14.5)
DE7.5E3S	1704 (67.1)	876 (34.5)	1268 (49.9)	884 (34.8)	575 (1267.7)	55.0 (14.5)
DE11E3S	1704 (67.1)	876 (34.5)	1268 (49.9)	884 (34.8)	650 (1433.0)	55.0 (14.5)
DE14E3S	1704 (67.1)	876 (34.5)	1268 (49.9)	884 (34.8)	706 (1556.5)	55.0 (14.5)
DE16E3S	1704 (67.1)	876 (34.5)	1268 (49.9)	884 (34.8)	719 (1585.1)	55.0 (14.5)

Net weight with lube oil, and coolant, no fuel. *Clearance required both sides.

Information contained in this publication may be considered confidential.
 Discretion is recommended when distributing.
 Materials and specifications are subject to change without notice.
 CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow," the "Power Edge"
 trade dress, as well as corporate and product identity used herein, are trademarks
 of Caterpillar and may not be used without permission.

www.Cat-ElectricPower.com

© 2014 Caterpillar
 All Rights Reserved.
 Printed in U.S.A.